

# Adapters (SM/MM)

## Description

GET'S adapters are ultra reliable components featuring low insertion loss and return loss. The adapters come with your choice of various types of commonly used connector type to meet your requirements.



## Features

- ❖ Low return loss
- ❖ Low insertion loss
- ❖ Environmentally stable
- ❖ Easy installation


## Applications

- ❖ Testing instruments
- ❖ Telecommunications
- ❖ CATV
- ❖ Local area network

## Product specifications

Mode Type	APC	SM	MM
Housing Color	Green	Blue	Beige
Main Body Material	UL-Rated Plastic		
Sleeve	Zirconia / Phosphor Bronze		
Type	Simplex / Duplex		
Typical Insertion Loss (dB)	$\leq 0.2$ (Zirconia) / $\leq 0.3$ (Bronze)		
Retention Force (grams)	200 ~ 600		
Durability (200 matings)	0.12dB max. increase		
Operating Temperature (°C)	-40 ~ +70		
Storage Temperature (°C)	-55 ~ +85		

## Ordering Information

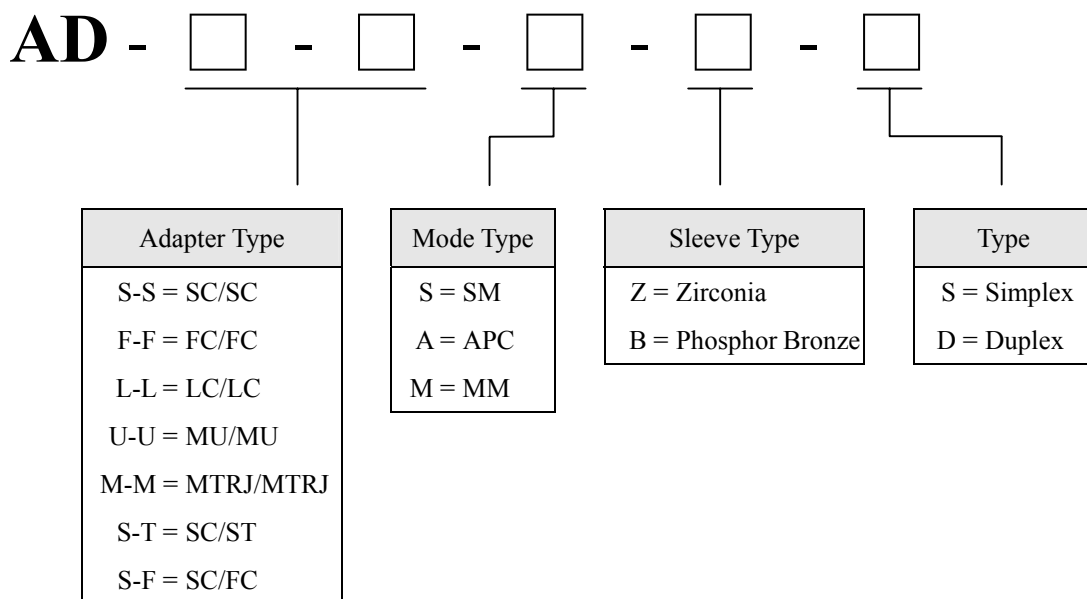

## Special Requirements by Customer



**建毅科技股份有限公司**  
Gloriote Electroptic Technology Co., Ltd.

[www.Gloriote.com.tw](http://www.Gloriote.com.tw)

**Address:** Fl. 3, No. 248-16, Shin Shen Rd., Kaohsiung L.E.P.Z , Taiwan, R.O.C.

**Email:** sales@gloriote.com.tw

**TEL:** 886-7-8139739

**Fax:** 886-7-8150504

**North America: Sales:** Diane Bond

**Email:** sales@gloriote.com.tw

**TEL:** 886-7-8139739

**Fax:** 886-7-8150504