


# CATV Optical Node Cable


## Description

Gloriole's Optical Node Cable comes fully assembled with a standard 5/8" 24-thread metal housing and provides secure, watertight connections for safe installation and easy operation. Several cable types, configurations and connector styles are available for CATV receiver applications.

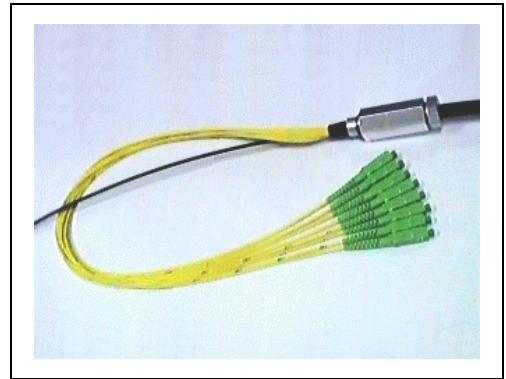

## Features

- ❖ Low insertion loss
- ❖ Low reflectance
- ❖ Flawless end face
- ❖ High reliability
- ❖ Safe installation
- ❖ Easy operation

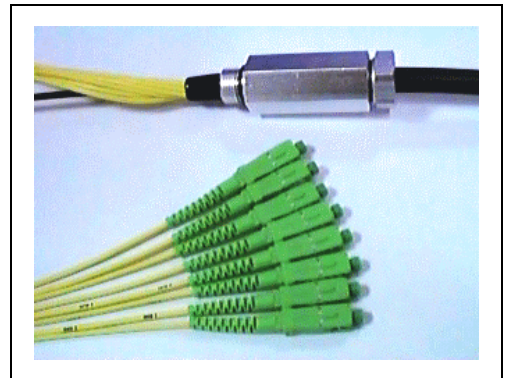

## Applications

- ❖ Telecommunications
- ❖ CATV
- ❖ FTTH
- ❖ LAN

## Product specifications

Performance		Value
Fiber Count		4 / 6 / 8 / 12
Pigtail Type		FC/PC, SC/PC, ST/PC, LC/PC, MU/PC, FC/APC, SC/APC
Insertion Loss		< 0.3 dB
Reflectance	PC	≥ 55dB
	APC	≥ 65dB

## Ordering Information

NC -  -  -  -  -  -

Fiber Count:
04 = 4 fibers
06 = 6 fibers
08 = 8 fibers
12 = 12 fibers

Cable Type:
1 = Armoured
2 = Non-armoured

Cable Length (m):
16 = 16 meters
32 = 32 meters
48 = 48 meters

Connector:
1 = SC/PC
2 = FC/PC
3 = ST/PC
4 = SC/APC
5 = FC/APC
6 = LC/PC
7 = MU/PC

Inner Jacket:
2 = 2.0mm
3 = 3.0mm

Inner Jacket Length (cm):
10 = 10 cm
15 = 15 cm
20 = 20 cm
25 = 25 cm

## Special Requirements by Customer



**建毅科技股份有限公司**

Gloriote Electroptic Technology Co., Ltd.

[www.Gloriote.com.tw](http://www.Gloriote.com.tw)

**Address:** Fl. 3, No. 248-16, Shin Shen Rd., Kaohsiung L.E.P.Z, Taiwan, R.O.C.

**Email:** sales@gloriote.com.tw

**TEL:** 886-7-8139739

**Fax:** 886-7-8150504