


Ribbon Fan-out Cord

Description

GET's Ribbon Fan-out Cords are ideal for high density interconnect applications requiring a compact design with minimal storage. Excellent optical performance and mechanical characteristics are guaranteed to conform to today's advanced fiber network demands. Available in a variety of connector types and fiber counts to meet customer-specific needs.

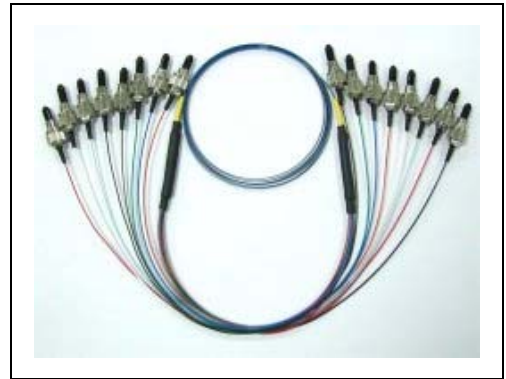

Features

- ❖ Low insertion loss
- ❖ Low reflectance
- ❖ Flawless end face
- ❖ High reliability
- ❖ Compact design

Applications

- ❖ Telecommunications
- ❖ CATV
- ❖ FTTH
- ❖ LAN
- ❖ Testing equipment

Product specifications


Performance	Value
Wavelength	1310nm and 1550nm
Pigtail Type	SC, FC, MU, LC
Insertion Loss	< 0.3 dB
Reflectance	SPC 50dB ~ 55dB
	UPC > 56dB
	APC > 67dB

Ordering Information

FC - - - -

Fiber Count:	Pigtail (0.9mm)		Loose Ribbon Length (m)	Pigtail Length (cm)
04 – 4 fibers	1 = SC/PC	5 = LC/PC	Assigned by customer	Assigned by customer
06 – 6 fibers	2 = FC/PC	6 = MU/PC		
08 – 8 fibers	3 = SC/APC	7 = ST		
12 – 12 fibers	4 = FC/APC			

Example: 8C Fan-out Cord

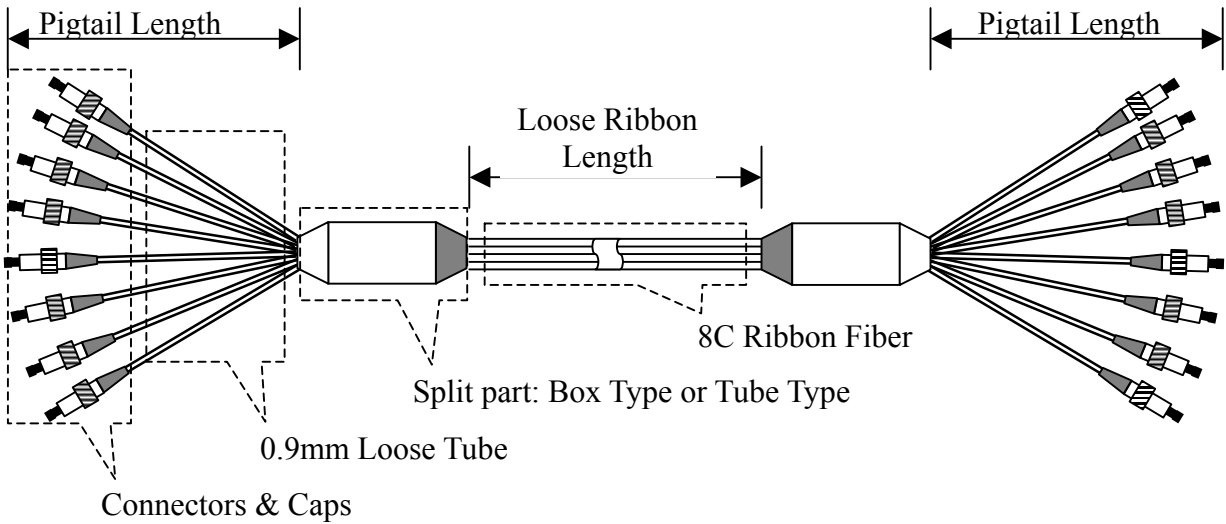

Special Requirements by Customer



建毅科技股份有限公司

Gloriote Electroptic Technology Co., Ltd.

www.Gloriote.com.tw

Address: Fl. 3, No. 248-16, Shin Shen Rd., Kaohsiung L.E.P.Z, Taiwan, R.O.C.

Email: sales@gloriote.com.tw

TEL: 886-7-8139739

Fax: 886-7-8150504